


Dennett Road Bridge Repairs

Presented to
Town of Kittery
February 26, 2017

Presented by
Maine Turnpike Authority




Dennett Road

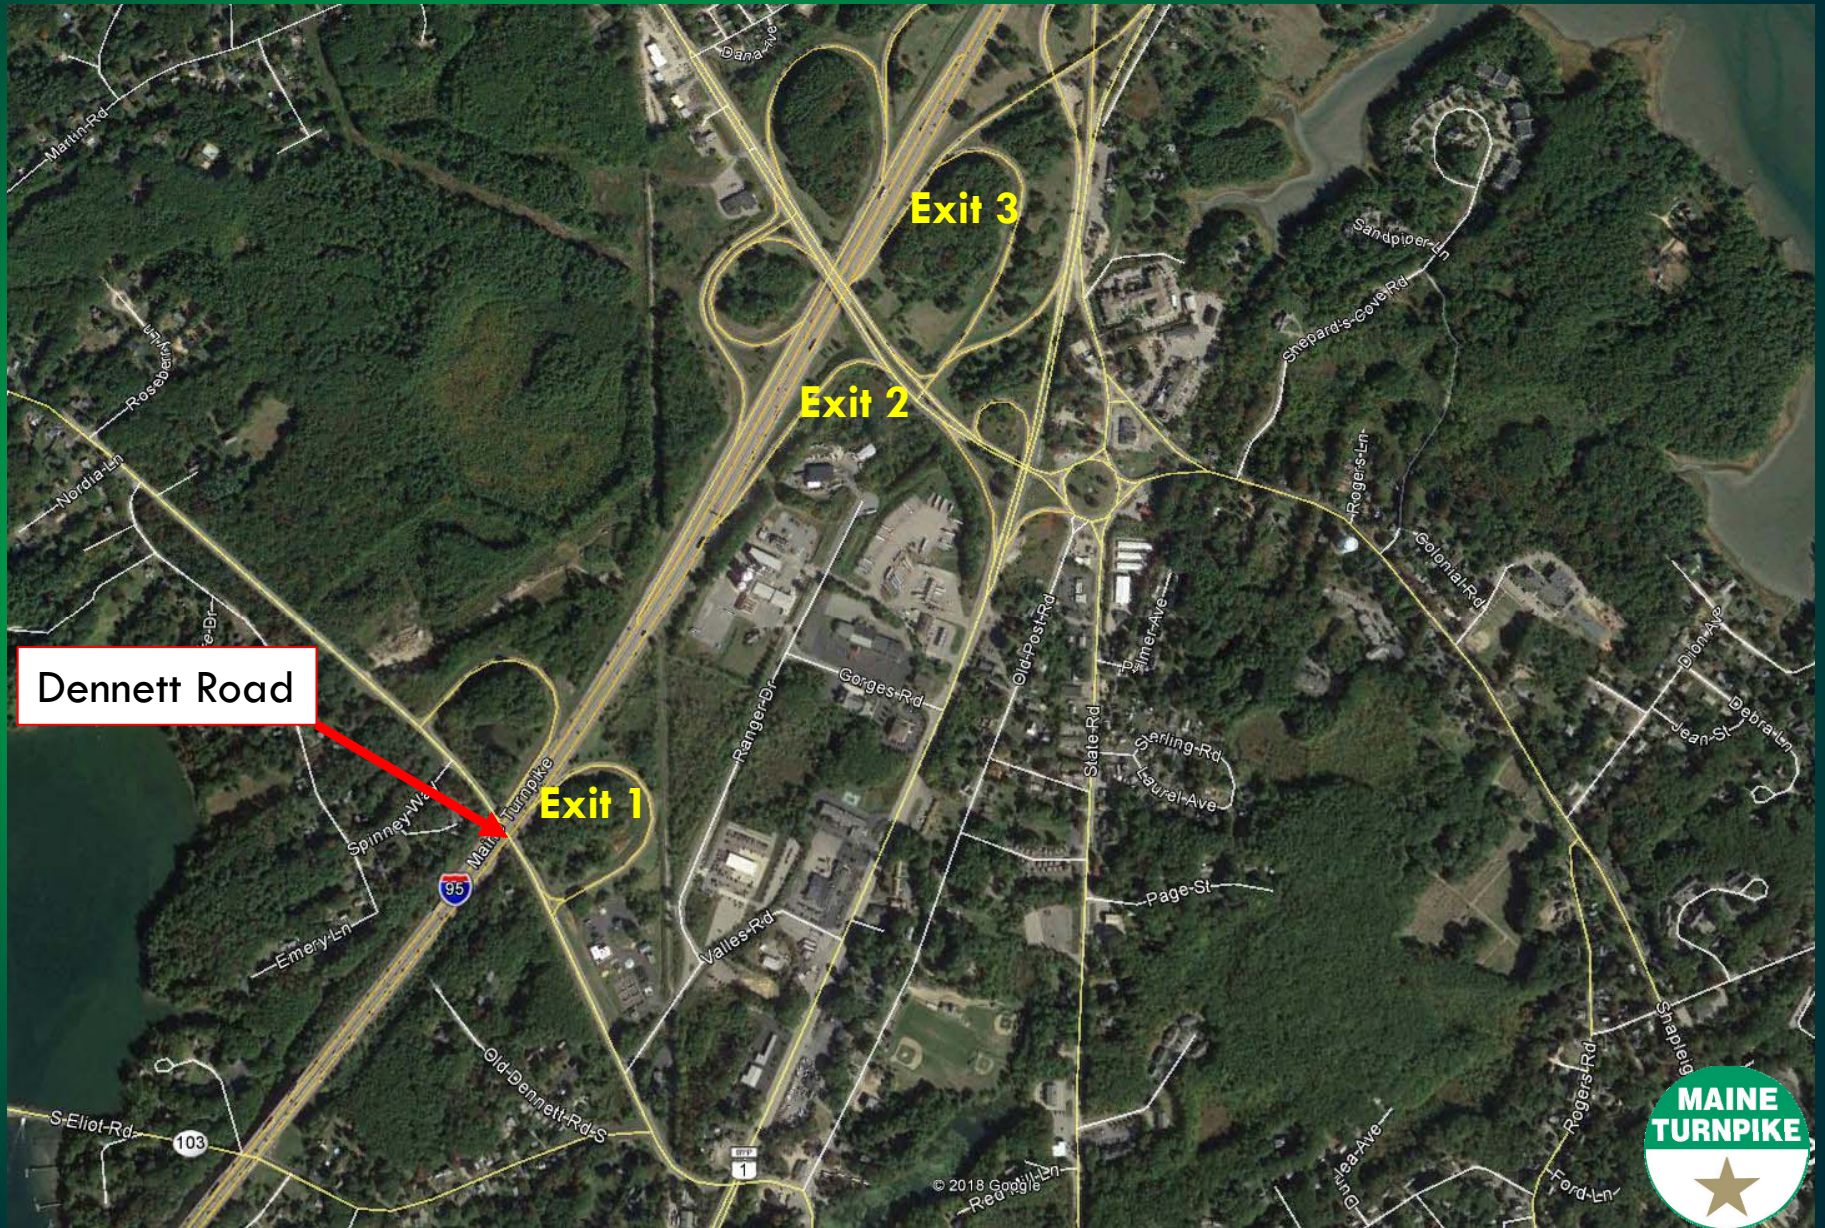

Scope of The Bridge Repairs

- New Pavement Surface on the Northbound Bridge
- Bridge Joint Repairs
- Bridge Bearing Repairs
- Reconstruct the Concrete End Post and Upgrade Guardrail Connections
- Upgrade Bridge Median Guardrail to be Concrete Barrier
- Abutment repairs
- Concrete Deck Repairs (Underside and Edge)
- Bridge Girder Repair
- Snow Fence



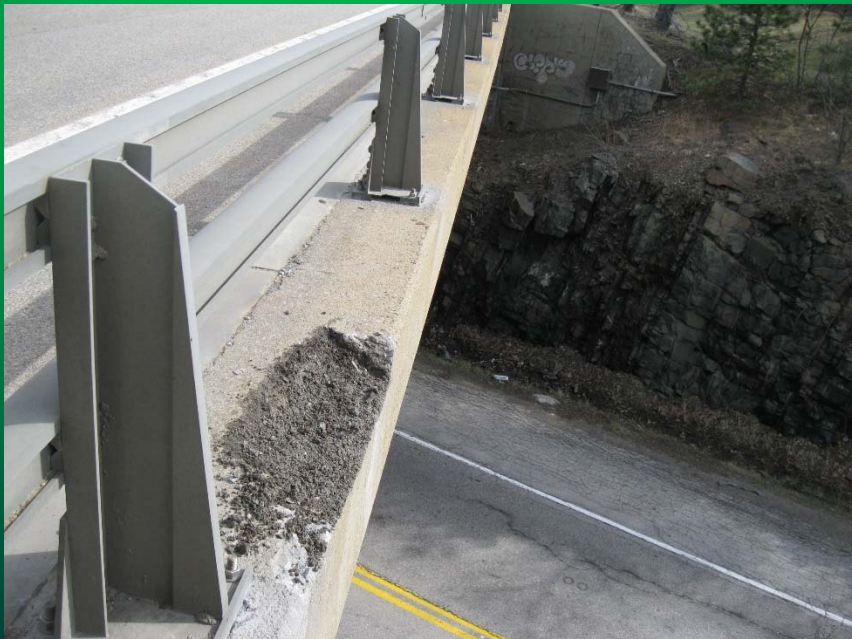

Schedule

- \$1.3 Million Contract
 - Dennett Road - \$900,000
 - Wilson Road Snow Fence - \$80,000
- Anticipate Start of Work in March
- Substantial Completion Scheduled for June 22nd



Traffic Impacts

- Turnpike Mainline
 - Three lanes of traffic in each direction will be maintained during peak travel times
- Exit 1 Northbound Ramp will be closed for duration of work on Turnpike Mainline Northbound to allow for Three travel lanes to be maintained on Turnpike
- Exit 1 Southbound Ramp will be closed for 28 days to allow for three travel lanes to be maintained on Turnpike



Anticipated Maintenance of Traffic Phases Phase 1



Anticipated Maintenance of Traffic Phases Phase 2



Anticipated Maintenance of Traffic Phases


Phase 3




Anticipated Maintenance of Traffic Phases Phase 4



Exit 1 NB Off Ramp Detour

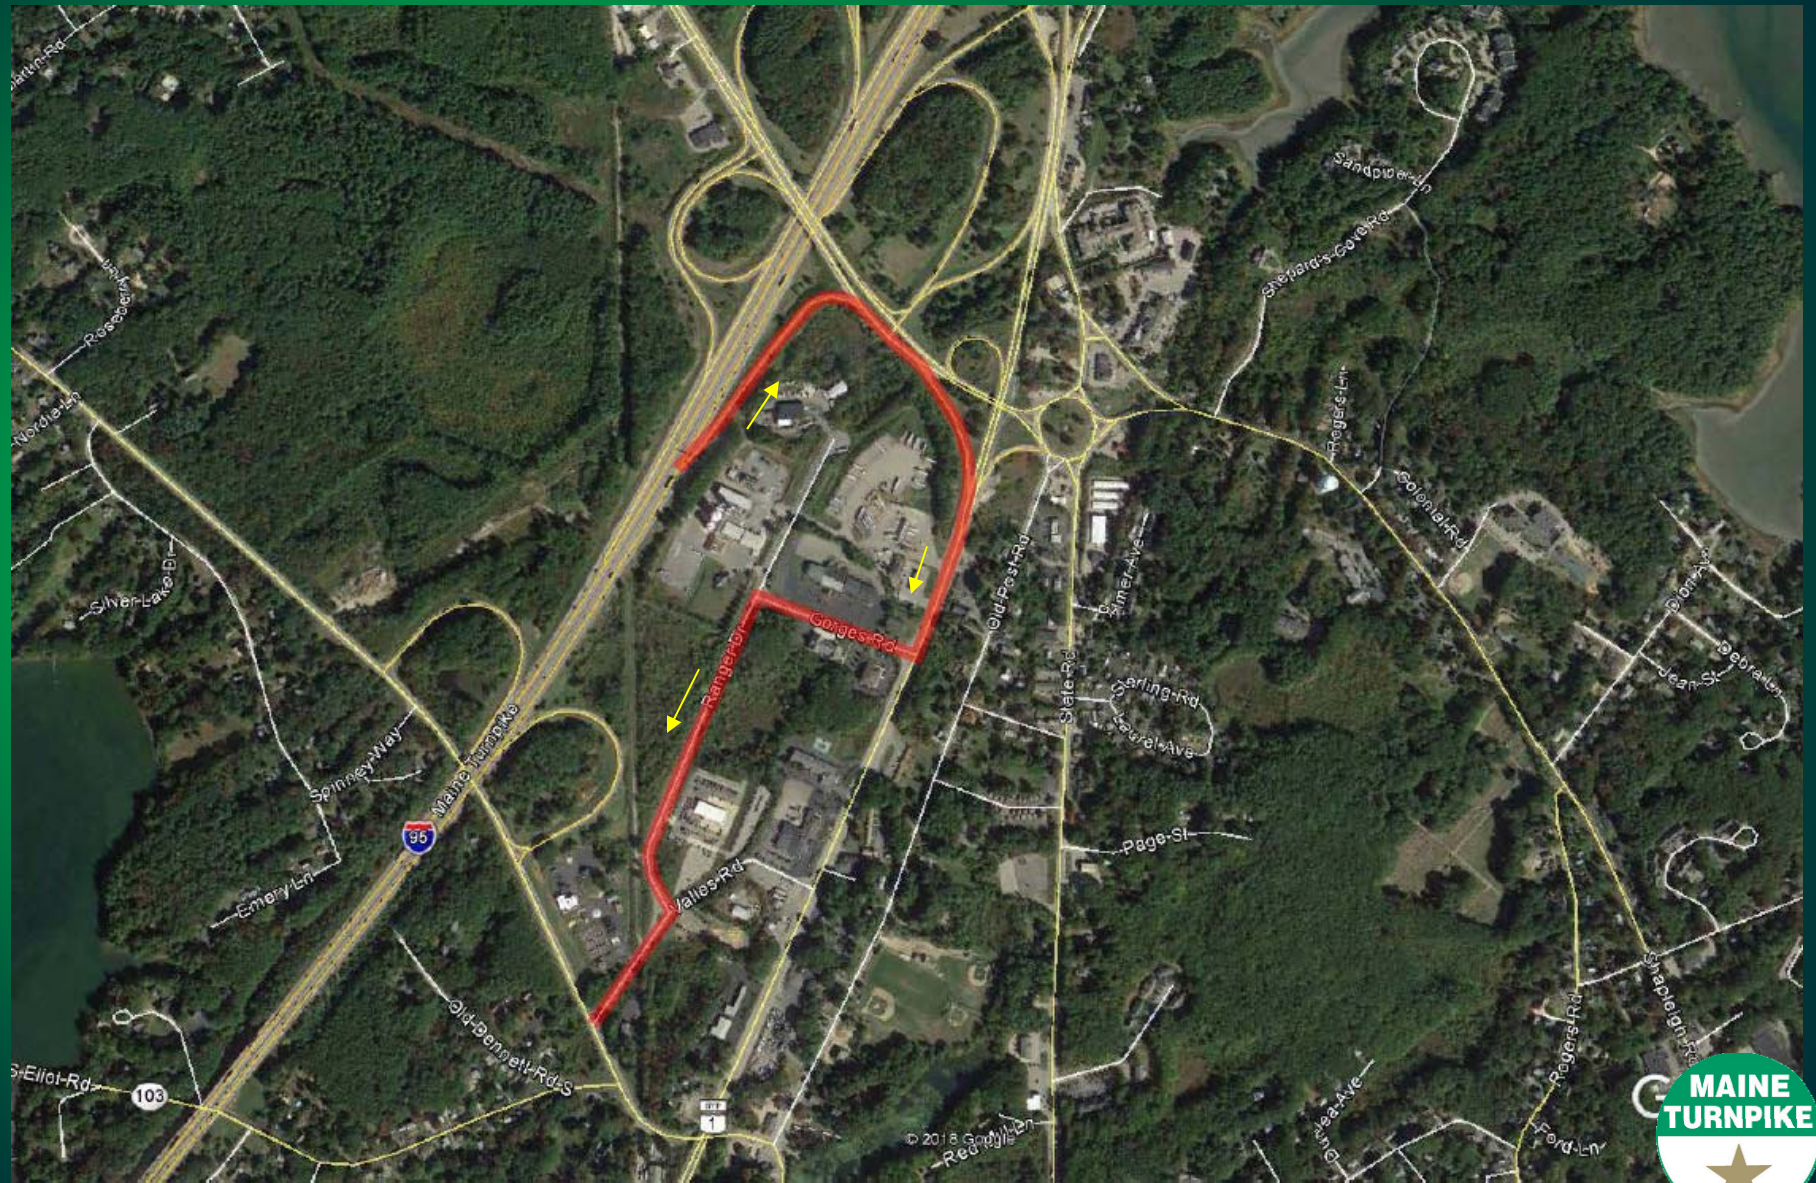

Exit 1 SB On Ramp Detour

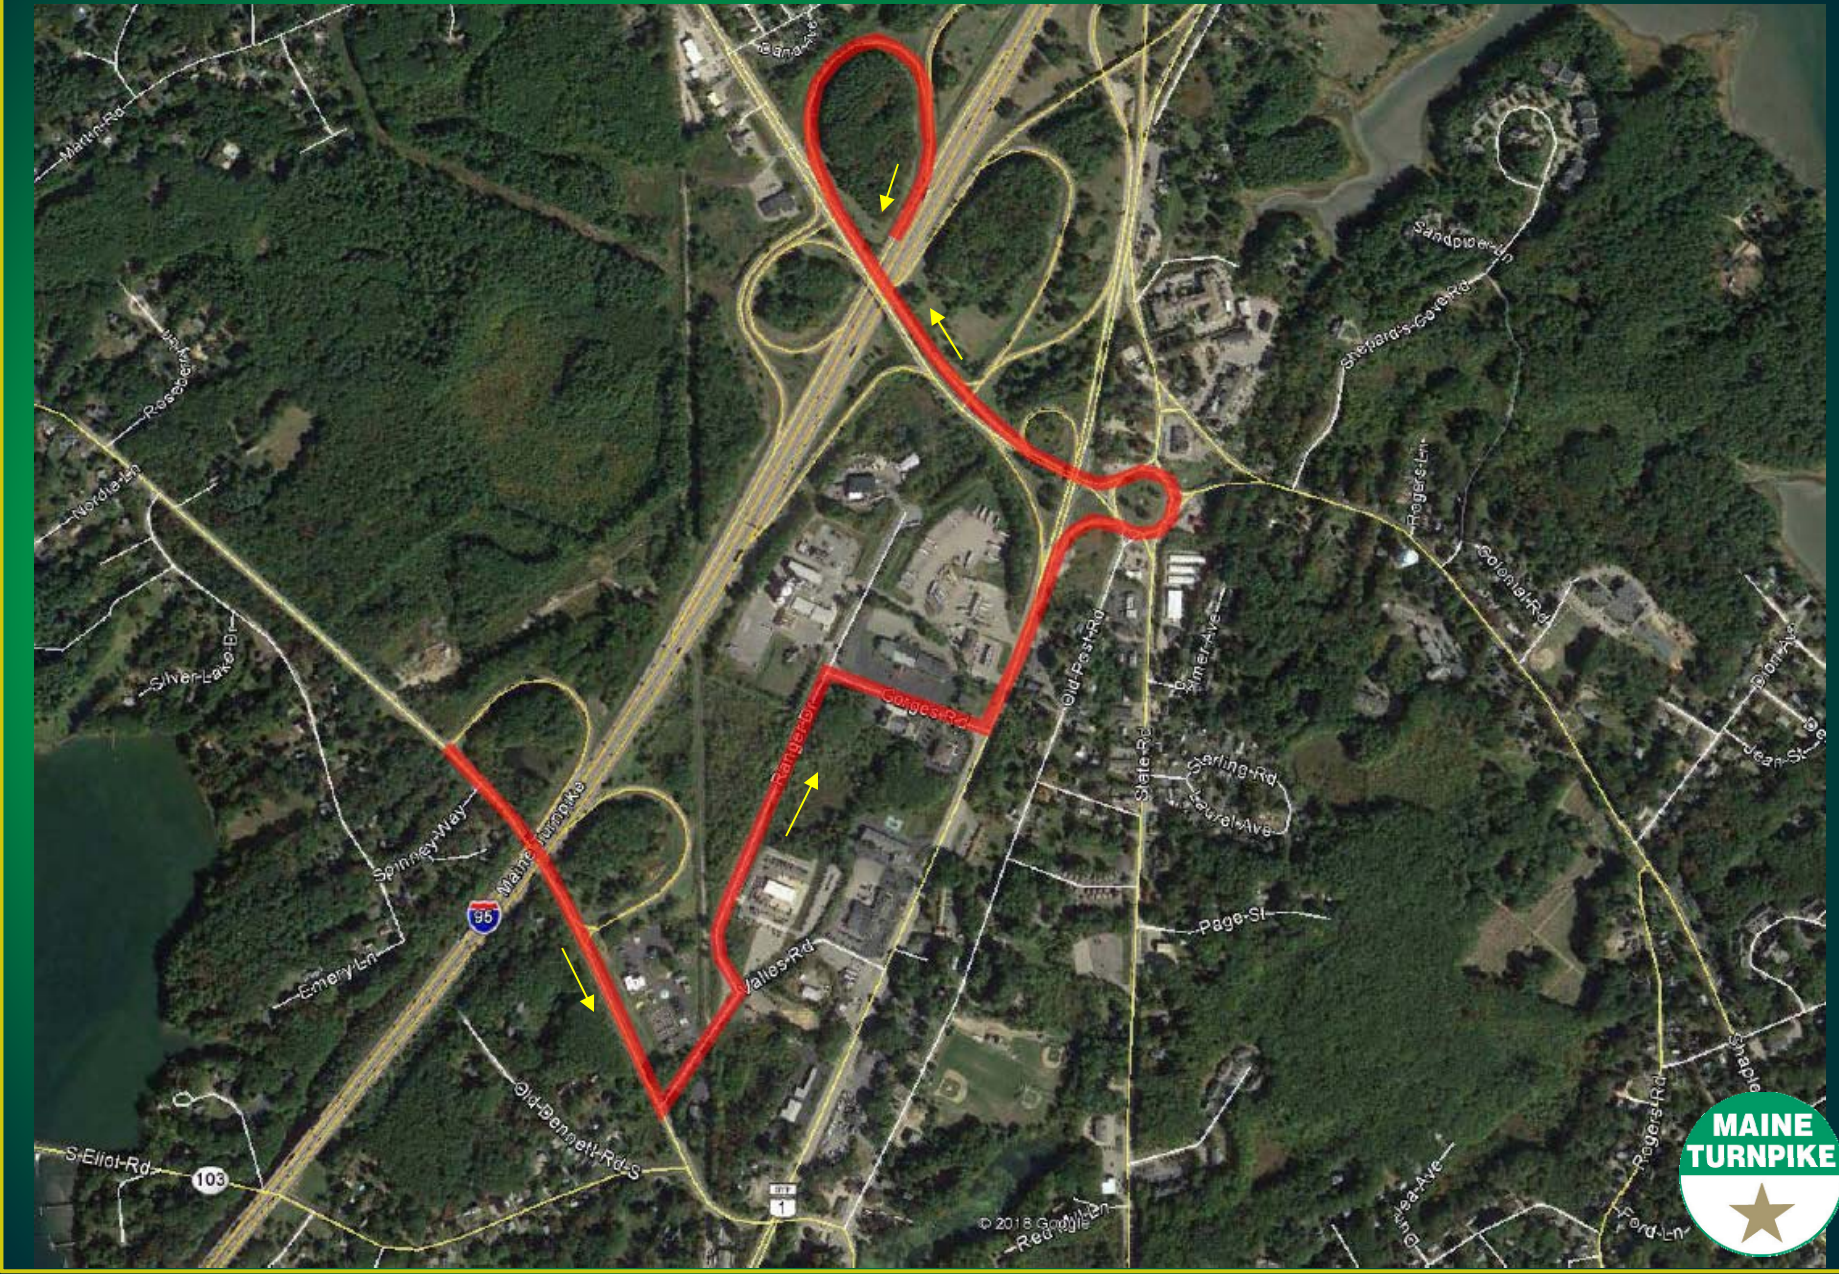

Thank You!

Questions?

For More Information:

www.maineturnpike.com

ecourtney@maineturnpike.com

